INSTALLATION AT A GLANCE · S6

Temporary roads and surfaces

TC Heavy Duty · TC Light Weight mats

GRIDMATS®

Reusable top-covered mats: laid in a day, lifted for the next site, and the ground is handed back clean. Six steps from bare ground to traffic. Your contractor builds it; we train the team.

1 Level the ground

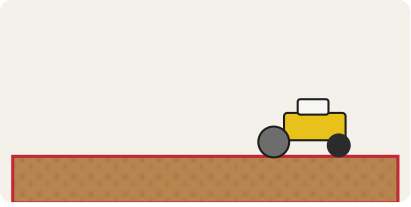

Level and trim. Remove sharp stones and debris; fill ruts with compacted granular material.

2 Geotextile if soft

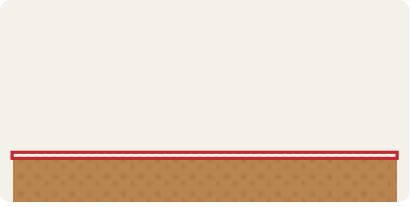

On soft or wet ground, a geotextile with 300 mm overlaps.

3 Lay and lock

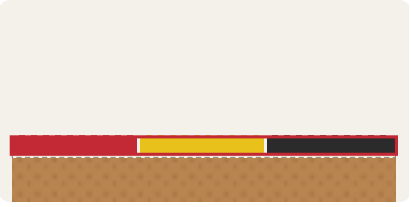

Start from a straight edge; lock each mat into its neighbours; stagger the joints.

4 Mark with colour

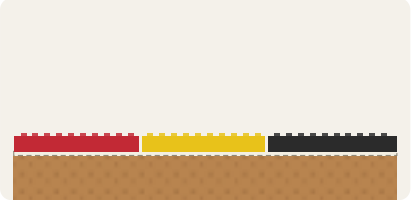

Black, yellow and red mats mark lanes, pads and walkways.

5 Open

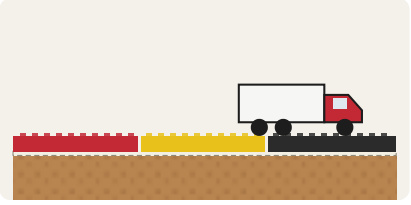

Traffic runs as soon as the mats are locked. For crane pads, the load rating is confirmed before the lift.

6 Lift and reuse

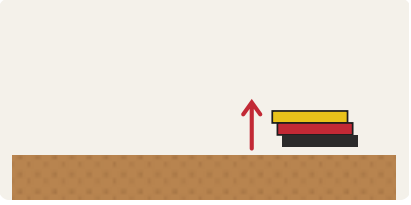

Unlock from the last mat laid, clean, stack flat, store out of direct sun, and reuse on the next site.

OPENS **Open as soon as the mats are locked** Lifted and reused on the next site

What you need

- TC Heavy Duty or TC Light Weight mats
- Geotextile for soft or wet ground
- Light plant to level the ground

Don't

- Lay over ruts or sharp stones
- Leave lifted edges after rain or heavy lifts
- Store the mats in direct sun for long periods

Mats locked edge to edge

Crane on top-covered mats at a wind site

Colours mark lanes and pads

This page is the short version. The installation guide comes by email on request. The SOP, the hold-point checklists, the method statement for your site and the training of your contractor's team come with your order. Designs, thicknesses and drainage are set for each site.

gridmats.com · sales@gridmats.com · +91 63626 GMATS (46287) · WhatsApp +91 81476 84653
GroundReality Enterprises Pvt. Ltd., Bengaluru · Indian Patent 398992 · 100% recycled polypropylene

Free estimate
gridmats.com